

Construction & Deployment Logistics

Modular. Redundant. Scaled for full Earth gravity.

Updated for 1g configuration with phased ring activation and expanded fleet architecture.

I. Overview

Aegis Station is deployed in phases, ring by ring, with core operations starting long before full completion. This modular approach spreads cost, reduces risk, and enables early returns on investment. Each ring is a self-contained system—physically and operationally isolated from the others—allowing phased crew arrival, testing, and activation.

II. Assembly in Three Stages

Stage 1: Launch & LEO Assembly

- Ring segments and dry structures launched via heavy-lift vehicles
- Initial assembly in low Earth orbit (LEO) with robotic and crew support
- No water launched from Earth
- Rings are built independently to avoid interdependency bottlenecks

Stage 2: Transfer to Lunar Orbit

- Assembled ring modules transferred to lunar orbit by electric or hybrid tugs
- Central hub remains non-rotating during transfer and initial positioning
- Spin-up occurs only after shielding is complete

Stage 3: Shielding with Lunar Water

- Shielding begins immediately upon arrival in lunar orbit
 - A fleet of 45 tankers delivers 3.3 million tons of lunar water directly into the outer hull of each ring
 - Shielding and early deck operations can proceed in parallel phases
-

III. Phased Ring Activation

Each ring is a self-contained, fault-isolated system with independent power, life support, and thermal control. This isolation supports phased crew arrival and systematic testing.

Ring A serves as the pathfinder:

- Begins spin-up to 1g once shielding is sufficient
- Hosts initial operations and engineering crews
- Validates all systems before Rings B and C follow

IV. Shielding Operations & Timeline

Each ring receives water through five evenly spaced fill ports, supplied by cartridge-based delivery systems.

For the initial fill, the ring remains stationary. This simplifies mass distribution, avoids dynamic slosh complications, and allows for controlled pressurization of the shield layer. The ring structure is engineered to handle full shielding mass while static, and to safely spin up to terminal velocity after shielding is complete.

Once filled, the ring is gradually brought up to its operational rotation rate to generate 1g at the outer floor. Top-offs and maintenance fills—which involve much smaller volumes—can occur while the ring is spinning, using synchronized cartridge vestibules and controlled delivery systems.

Parameter	Value
Per-ring shielding volume	~1.1 million tons
Total shielding volume	~3.3 million tons
Tanker payload	45 metric tons
Number of tankers	45
Daily delivery capacity	~2,025 tons/day
Full station fill time	~4.5 years

V. Cost Breakdown (Phases 1–3)

Component	Estimated Cost
Launch + dry mass to LEO	~\$300B
Tug transfers to lunar orbit	~\$10–30B
Lunar water sourcing + fill	~\$495B
Total construction phase	~\$805B

Includes station dry mass (~120,000 tons), shielding mass (~3.3 million tons), orbital transfer, fill infrastructure, and cartridge-based delivery.

VI. Operational Timeline (Illustrative)

Year	Milestone
1	Launch of dry modules begins
2	Ring A assembled in LEO
3	Ring A arrives in lunar orbit
4	Ring A begins shielding
5	Ring A operational at 1g
6	Ring B arrives, shielding begins
7–8	Ring C assembly and spin-up
9–10	Full station operational

VII. Why This Works

- Modular deployment reduces critical path complexity
 - Rings deliver incremental value before full buildout
 - Shielding is integrated into the structure—no external tanks
 - Long-hauler and tanker fleets operate in their optimal domains
 - The 1g specification supports long-term health and crew retention
-

VIII. Fleet Architecture


Long-Hauler Fleet

- Carries dry components from Earth to lunar orbit
- Assembled and tested in LEO
- Fully reusable, modular vehicles
- 5–10 haulers maintain continuous delivery cycles

Lunar Tanker Fleet (Upgraded for 1g)

- Assembled in lunar orbit
 - Each tanker lifts 45 tons of water per trip
 - Operates in closed loop: lunar surface → Aegis Station
 - A fleet of 45 tankers fills the station in ~4.5 years
-

IX. Logistics Flow

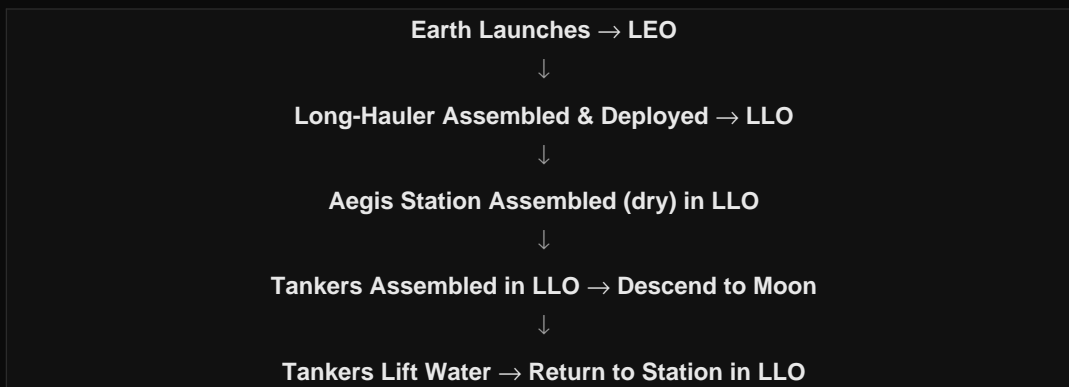

This high-efficiency path minimizes Earth lift cost, isolates risk domains, and maximizes throughput across the entire build sequence.

X. Modular Radial Modules for Gravity Simulation

Aegis Station enables precise gravity experimentation by installing modular segments along radial booms or structural spokes extending inward from the rings. These modules can be positioned at any desired radius from the central hub, enabling finely tuned simulation of partial gravity environments.

Gravity Radius Calculations

The station's rotation rate is fixed to generate 1g at a 400-meter radius. At this angular velocity (~0.1564 rad/s), specific gravity levels occur at the following radii:

Environment	Target Gravity	Required Radius
Earth (1g)	9.81 m/s ²	400 m
Mars (0.38g)	3.73 m/s ²	152.3 m
Moon (0.17g)	1.67 m/s ²	68.1 m

Applications

- Human adaptation studies (cardiovascular, skeletal, muscular)
- Martian or lunar habitat prototyping
- Agricultural tests in simulated gravity
- Equipment validation in fractional-G

This capability gives Aegis Station a strategic lead in developing off-world settlement technologies—from the safety and flexibility of lunar orbit.